

FIG. 1

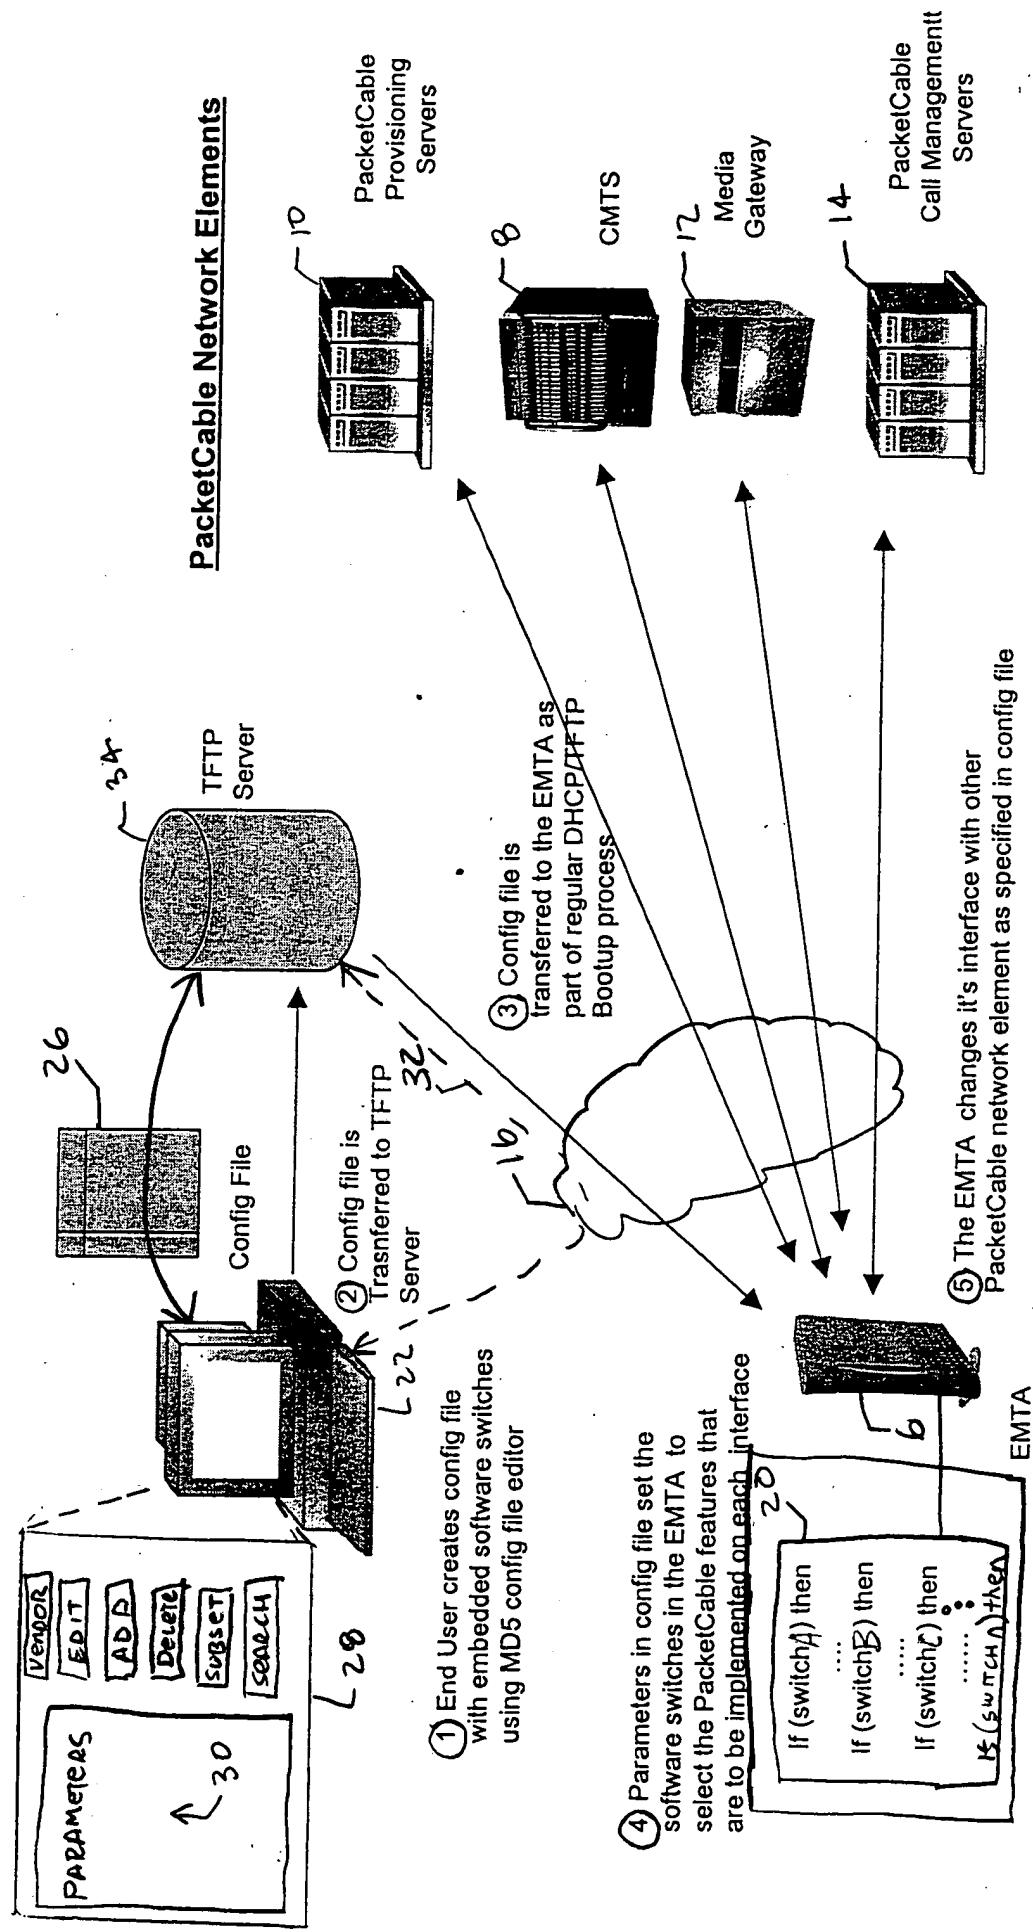


Fig. 2.

```

PacketACE - ARRIS_Single_Config.sng
File Edit Tools Help
CMTS MIC Key Config Type CM C MTA G Single
PacketACE®

PcipClassification =
  ... PcipProtocol = 17
  ... PcipSourceAddress = 0.0.0.0
  ... PcipSourceMask = 0.0.0.0
  ... PcipDestAddress = 0.0.0.0
  ... PcipDestMask = 0.0.0.0
  ... PcipSourcePortStart = 2427
  ... PcipSourcePortEnd = 2427
  ... DownstreamPacketClassification =
    ... PcsServiceFlowReference = 102
    ... PcrReference = 102
    ... PcrRulePriority = 1
    ... PcaActivationState = 1
  ... PcipClassification =
    ... PcipProtocol = 17
    ... PcipSourceAddress = 0.0.0.0
    ... PcipSourceMask = 0.0.0.0
    ... PcipDestAddress = 0.0.0.0
    ... PcipDestMask = 0.0.0.0
    ... PcipDestPortStart = 2427
    ... PcipDestPortEnd = 2427
    ... SnmpMib = ptktchMtaDevEnabled 0 true
    ... SnmpMib = snisCmDevProvMethodIndicator 0 singleMAC
    ... SnmpMib = ptktchMtaCallFeatureSwitch 0 hexstr 100.24.7B
    ... SnmpMib = ptktchNcEndPnConfigCallAgentId 9 "10.1.33.30"
    ... SnmpMib = ptktchNcEndPnConfigCallAgentId 10 "10.1.33.130"
    ... SnmpMib = ptktchNcEndPnConfigCallAgentUdpPort 9 2727
    ... SnmpMib = ptktchNcEndPnConfigCallAgentUdpPort 10 2727

```

30

Double click an item to Edit

28

39

42

FIG. 3